



(43) International Publication Date
23 December 2004 (23.12.2004)


PCT

(10) International Publication Number
WO 2004/111446 A1

- | | |
|--|--|
| <p>(51) International Patent Classification⁷: F03D 11/04, 7/04, F03B 15/06</p> <p>(21) International Application Number: PCT/NL2004/000421</p> <p>(22) International Filing Date: 14 June 2004 (14.06.2004)</p> <p>(25) Filing Language: Dutch</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
1023666 14 June 2003 (14.06.2003) NL</p> <p>(71) Applicant (for all designated States except US): ENERGIEONDERZOEK CENTRUM NEDERLAND (ECN) [NL/NL]; Westerduinweg 3, NL-1755 LE Petten (NL).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): CORTEN, Gustave, Paul [NL/NL]; Schoenmakerstraat 103, NL-1825 CD</p> | <p>Alkmaar (NL). SCHAAK, Pieter [NL/NL]; Themislaan 7, NL-1702 AS Heerhugowaard (NL).</p> <p>(74) Agents: VAN WESTENBRUGGE, Andries et al.; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).</p> <p>(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.</p> <p>(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,</p> |
|--|--|

[Continued on next page]

- (54) Title: METHOD AND INSTALLATION FOR EXTRACTING ENERGY FROM A FLOWING FLUID**

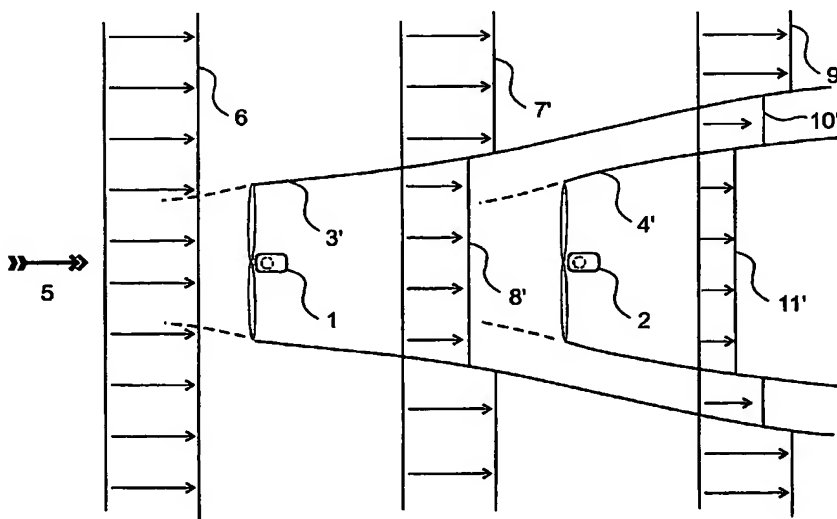

- (57) Abstract:** Turbine farm comprising at least a first turbine (1) and at least a second turbine (2) by means of which energy can be extracted from a flowing fluid, wherein when the second turbine is on the lee side of the first turbine, under nominal power, the axial induction of the first turbine is lowered with respect to the second turbine, to reduce turbulence mainly at the location of the at least second turbine.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*